



76\$ /

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA /



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ ' & ' & RQYHUWHUV
- ‡ \$ & ' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXSHVSHUNYHYURQWDJH		9550		9
0D[LXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUHQW VLQDQHQZDYH VXSHULPSRQDWHGRSGLRGH		,)60		\$
2SHUDMXQEDQGRWRUDJH WHPSHUDW		X0H76D°C	JH WR	f &
7\SLFDO WIKHULPBDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRDUG SHGLRGH	,) \$	7- f &	7 < 3	9
	,) \$	7- f &	0\$;	
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHQWIRQW UDWHYHYURQWDJH	7- f &	,5		X\$
	7- f &			X\$



1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES 7 \$

f & X Q O H V Q R W K B U Z L V H

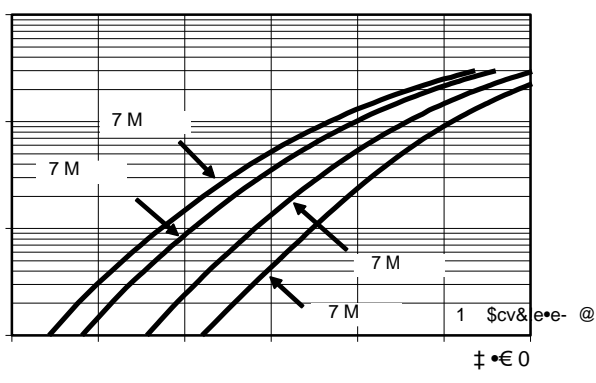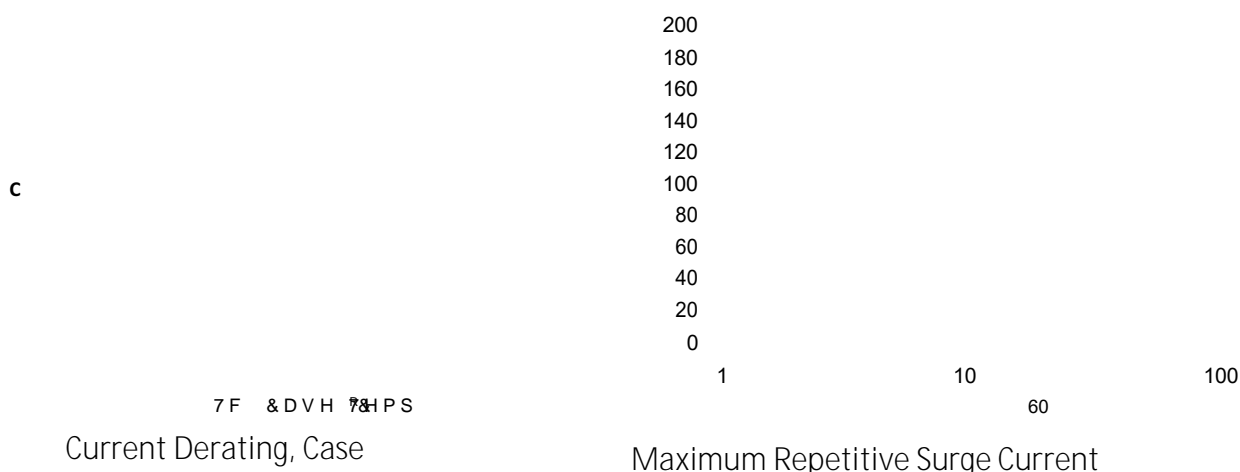


v l nl l


PACKAGE OUTLINE DIMENSIONS



0DUNLQJ ,QIRUPDWLRQ

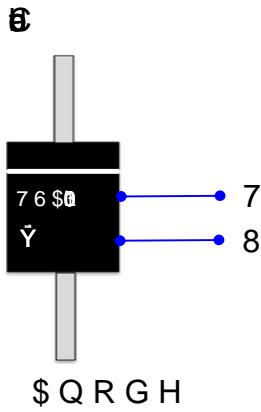


73URGXFW PRGH



3DFNDJLQJ ,QIRUPDWLRQ

,QVLGH %R[

2XWVLGH %R[

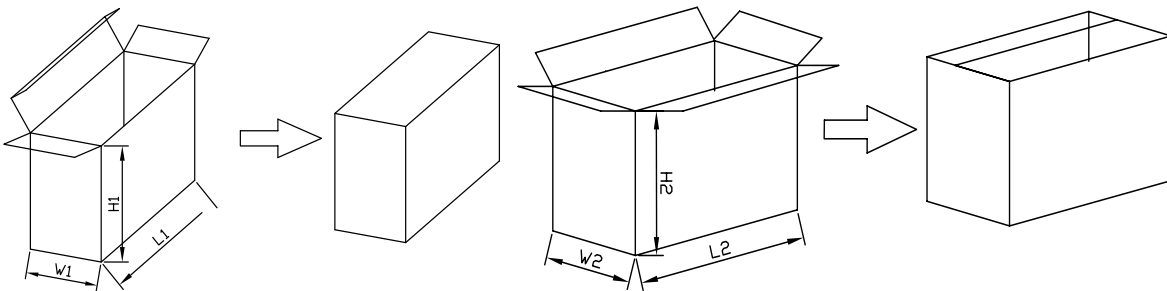

3DFNDJLQJ ,QIRUPDWLRQ

12	81,	,QVLGH %R[2XWVLGH %R[
6L]H	PP	/	:	+	/	:	+
UVY	UOU	U { æ ^•cå }æ& \æ* ^ÉFÉÉÉÚÔÙD&æ;c [}Á			FÉÉÉÉÚÔÙD&æ;c [}ÉFÉÉÉà [ç^•Áå }Ác [çæ]		
P[c^	V[^!æ}&^	mGÉ { { É†H { { L GFÉFÉÉ { { É†Í { { L FÉFÉÉÉ { { É†FÉ { {					