



76\$ 9


129

RATINGS AND CHARACTERISTICS CURVES

7\$

f & XQOHVQRWKB UZLVH


, I \$ Y H U D B R W J Z D & X G J U I \$ Q W

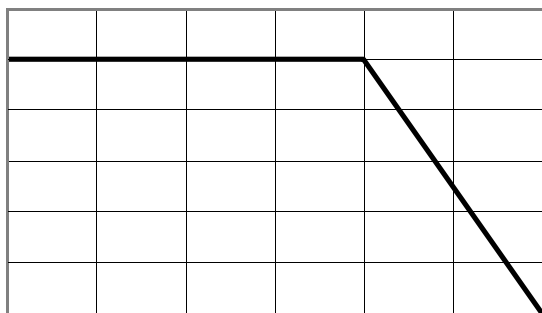

7F & DVH 7&1PS

Current Derating, Case


Peak Forward Surge Current (A)

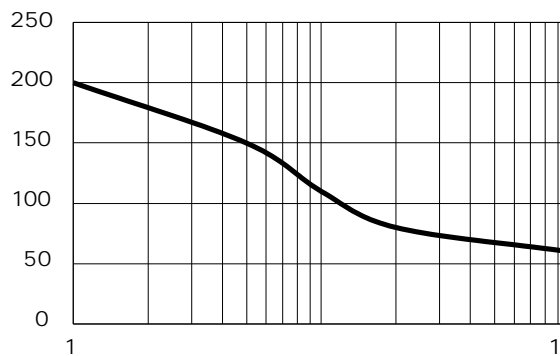

Number of Cycles at 60 Hz

Maximum Repetitive Surge Current

, I , Q V W D Q W R O I Z B X X G J U I \$ Q W

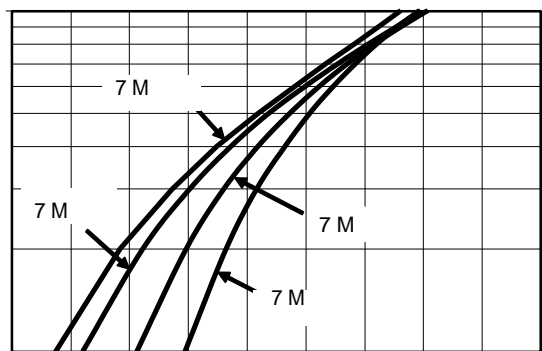

9I , Q V W D Q W D Q H R X V) R U Z D U G

Typical Forward Voltage

, U 5 H Y H U & X H J U I \$ Q W




9 R O W D J H P 9


95 5 H Y H U V H 9 R O W D J H

9 R O W V

Typical Reverse Current

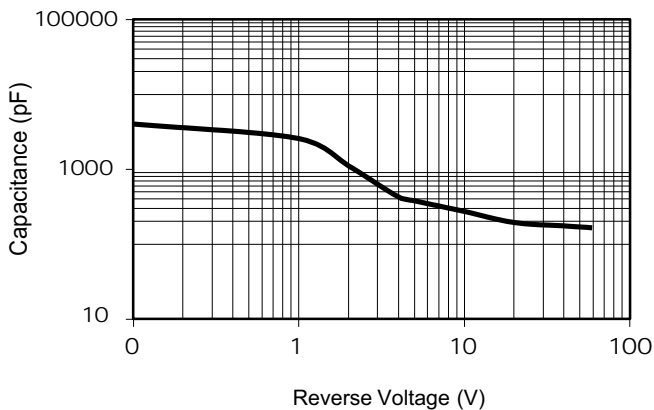


d C % o] o : μ v š] } v % o] š v

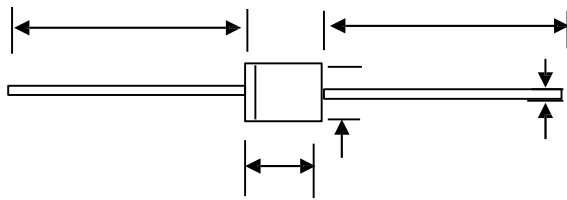PACKAGE OUTLINE DIMENSIONS**DO-201AD**

DO-201AD mechanical data

| UNIT | | A | B | | D |
|------|-----|---------|--------|---|--------|
| mm | max | 26.5 | 9.5 | 4 | 5.3 |
| | min | 24.5 | 7.3 | 1 | 4.8 |
| mil | max | 1043.30 | 374.01 | | 208.67 |
| | min | 946.57 | 287.40 | | 188.97 |

Cathode

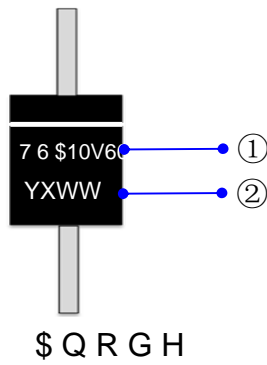

①Product model : TSA10V60

②PDC information



③Y X WW

WW:Week code(01 to 53)



X:Internal identification code

Y:Year code(ex:0=2020)

1.Inside Box

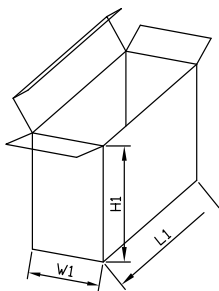

2.Outside Box



| NO | UNIT | Inside Box | | | Outside Box | | |
|------|-----------|---------------------------------|----|-----------------|------------------------------------|-----|-----|
| | | L1 | W1 | H1 | L2 | W2 | H2 |
| Size | mm | 255 | 75 | 1 | | 210 | 320 |
| QTY | PCS | Smallest package,1000PCS/carton | | | 10,000PCS/carton,10 boxes in total | | |
| Note | Tolerance | 20mm,±3mm; 21-100mm,±5mm; | | 101-500mm,±10mm | | | |